



How to Add a DS-MH6171 to iVMS-4500


Note:



1. Before adding a DS-MH6171 to iVMS-4500, you should download an iVMS-4500 app on your mobile phone;

Add the device to iVMS-4500

1. Connect the mobile phone to the Wi-Fi hot spot generated by DS-MH6171: Dome_xxxxxx(the serial number of the device).

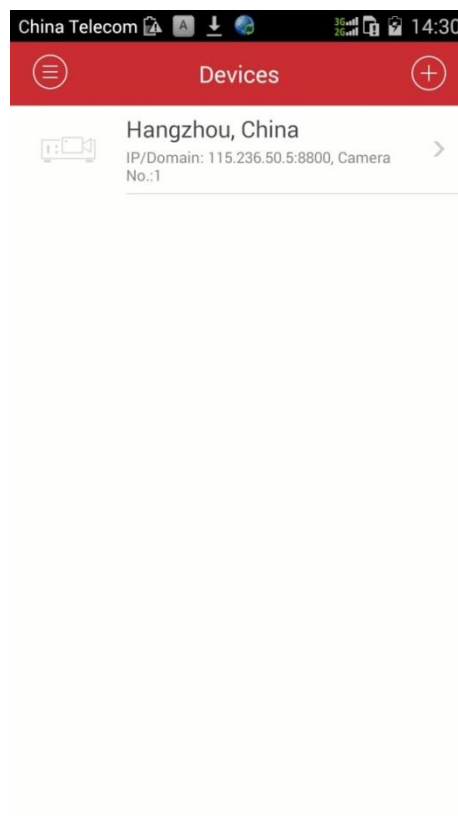2. Run the iVMS-4500  on your phone, click the icon  and choose the option of “Devices” , and it will show the interface as follows:




3. Click , and choose “Manual Adding” , then come to the interface of adding new device.

-Register Mode: choose IP/Domain

-Address: 192.168.1.1(The default IP for Wi-Fi access)

-Port: 8000(the default port)


-User name/Pass word: admin/abcd1234 (default User name/ Password)

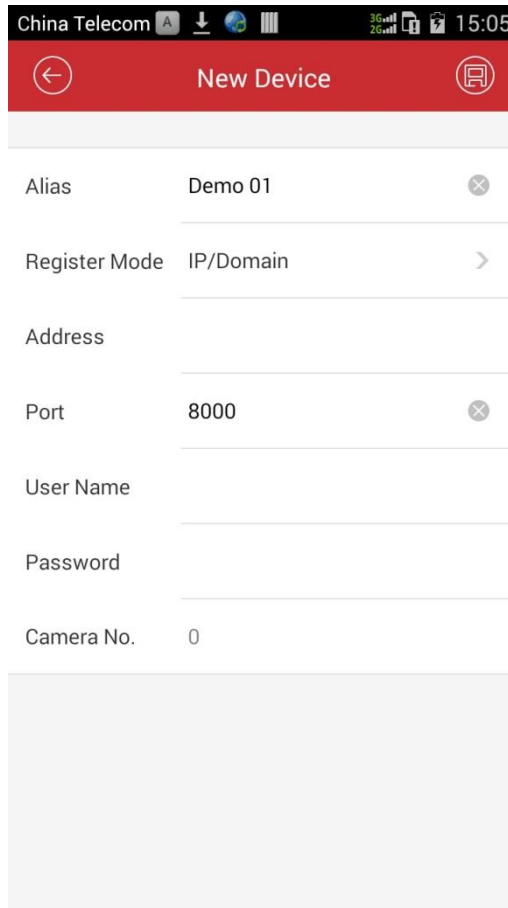


The screenshot shows a mobile application interface for configuring a new device. The title bar is red and contains a back arrow, the text "New Device", and a save icon. Below the title bar, there are several input fields with labels and values:


Alias	Demo 01	✕
Register Mode	IP/Domain	>
Address		
Port	8000	✕
User Name		
Password		
Camera No.	0	

Below the input fields is a large, empty grey rectangular area.

4. Click  to save the information of the device.

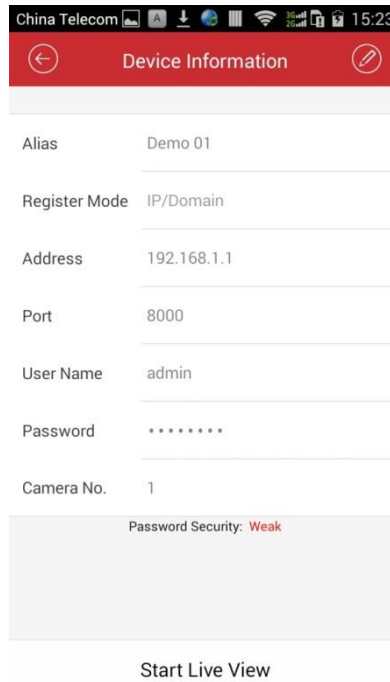

- At the bottom of the page, it will show "Start Live View", and then click here and you can see the live view video of this DS-MH6171 if you succeed to add the device. And if you fail to add the device, it will show the corresponding error information.

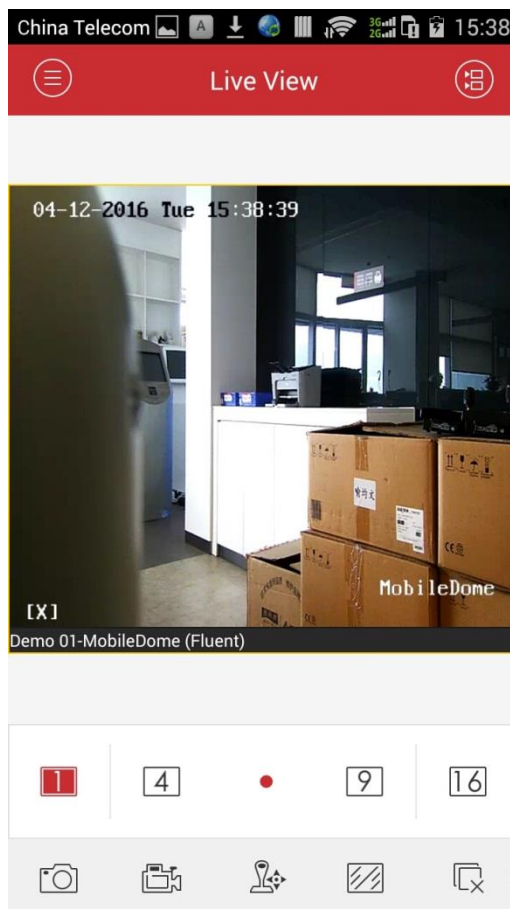

6. If you succeed to add the device, the device information will show in the page of “Devices”, like the following picture shows (Demo 01).



First Choice for Security Professionals

HIKVISION Technical Support